


Akku-Drehschrauber DA1

Battery Nutrunner DA1

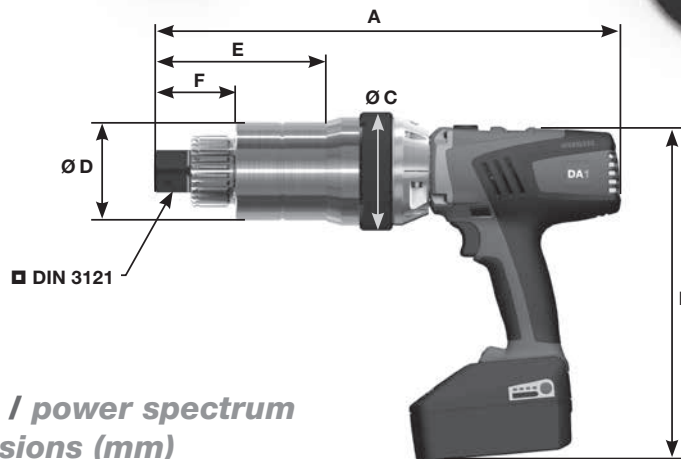


Leistungsspektrum / power spectrum

Maße (mm) / dimensions (mm)

Typ/ Type	Drehmoment- bereich, Torque range (Nm)	G 1 (U/min, rpm)	G 2 (U/min, rpm)	G 3 (U/min, rpm)	G 4 (U/min, rpm)	Gewicht Weight (kg)	A (mm)	B (mm)	Ø C (mm)	Ø D (mm)	E (mm)	F (mm)	■ inch
DA1-05	100 - 550	13,9	27,4	61,0	117,2	5,1	347	245	90	74	126,5	57,5	¾"
DA1-10	160 - 1.000	6,8	13,8	30,7	58,0	5,2	351	245	90	74	130,5	61,5	1"
DA1-13	160 - 1.300	5,5	11,2	25,3	48,3	6,2	363	245	90	93	131,5	61,5	1"
DA1-30	170 - 3.000	2,2	4,3	10,1	19,2	7,9	410	245	90	98	169,5	71,5	1"
DA1-47	500 - 4.700	1,4	2,8	6,3	12,5	10,4	435	245	90	99	191,0	83,5	1½"

Standard-Abstützungen DA1 / Standard reaction arm DA1

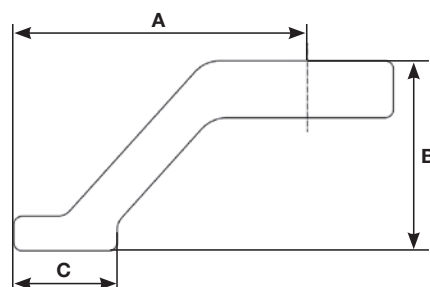

Typ/ Type	A (mm)	B (mm)	C (mm)	Gewicht Weight (kg)
DA1-05	110	80	50	0,3
DA1-10	130	100	60	0,5
DA1-13	130	100	60	0,5
DA1-30	170	110	60	1,0
DA1-47	170	130	60	1,2